


RECYFIX® POINT FASERFIX® POINT STANDARD

Point drainage for yards, garages and patios.



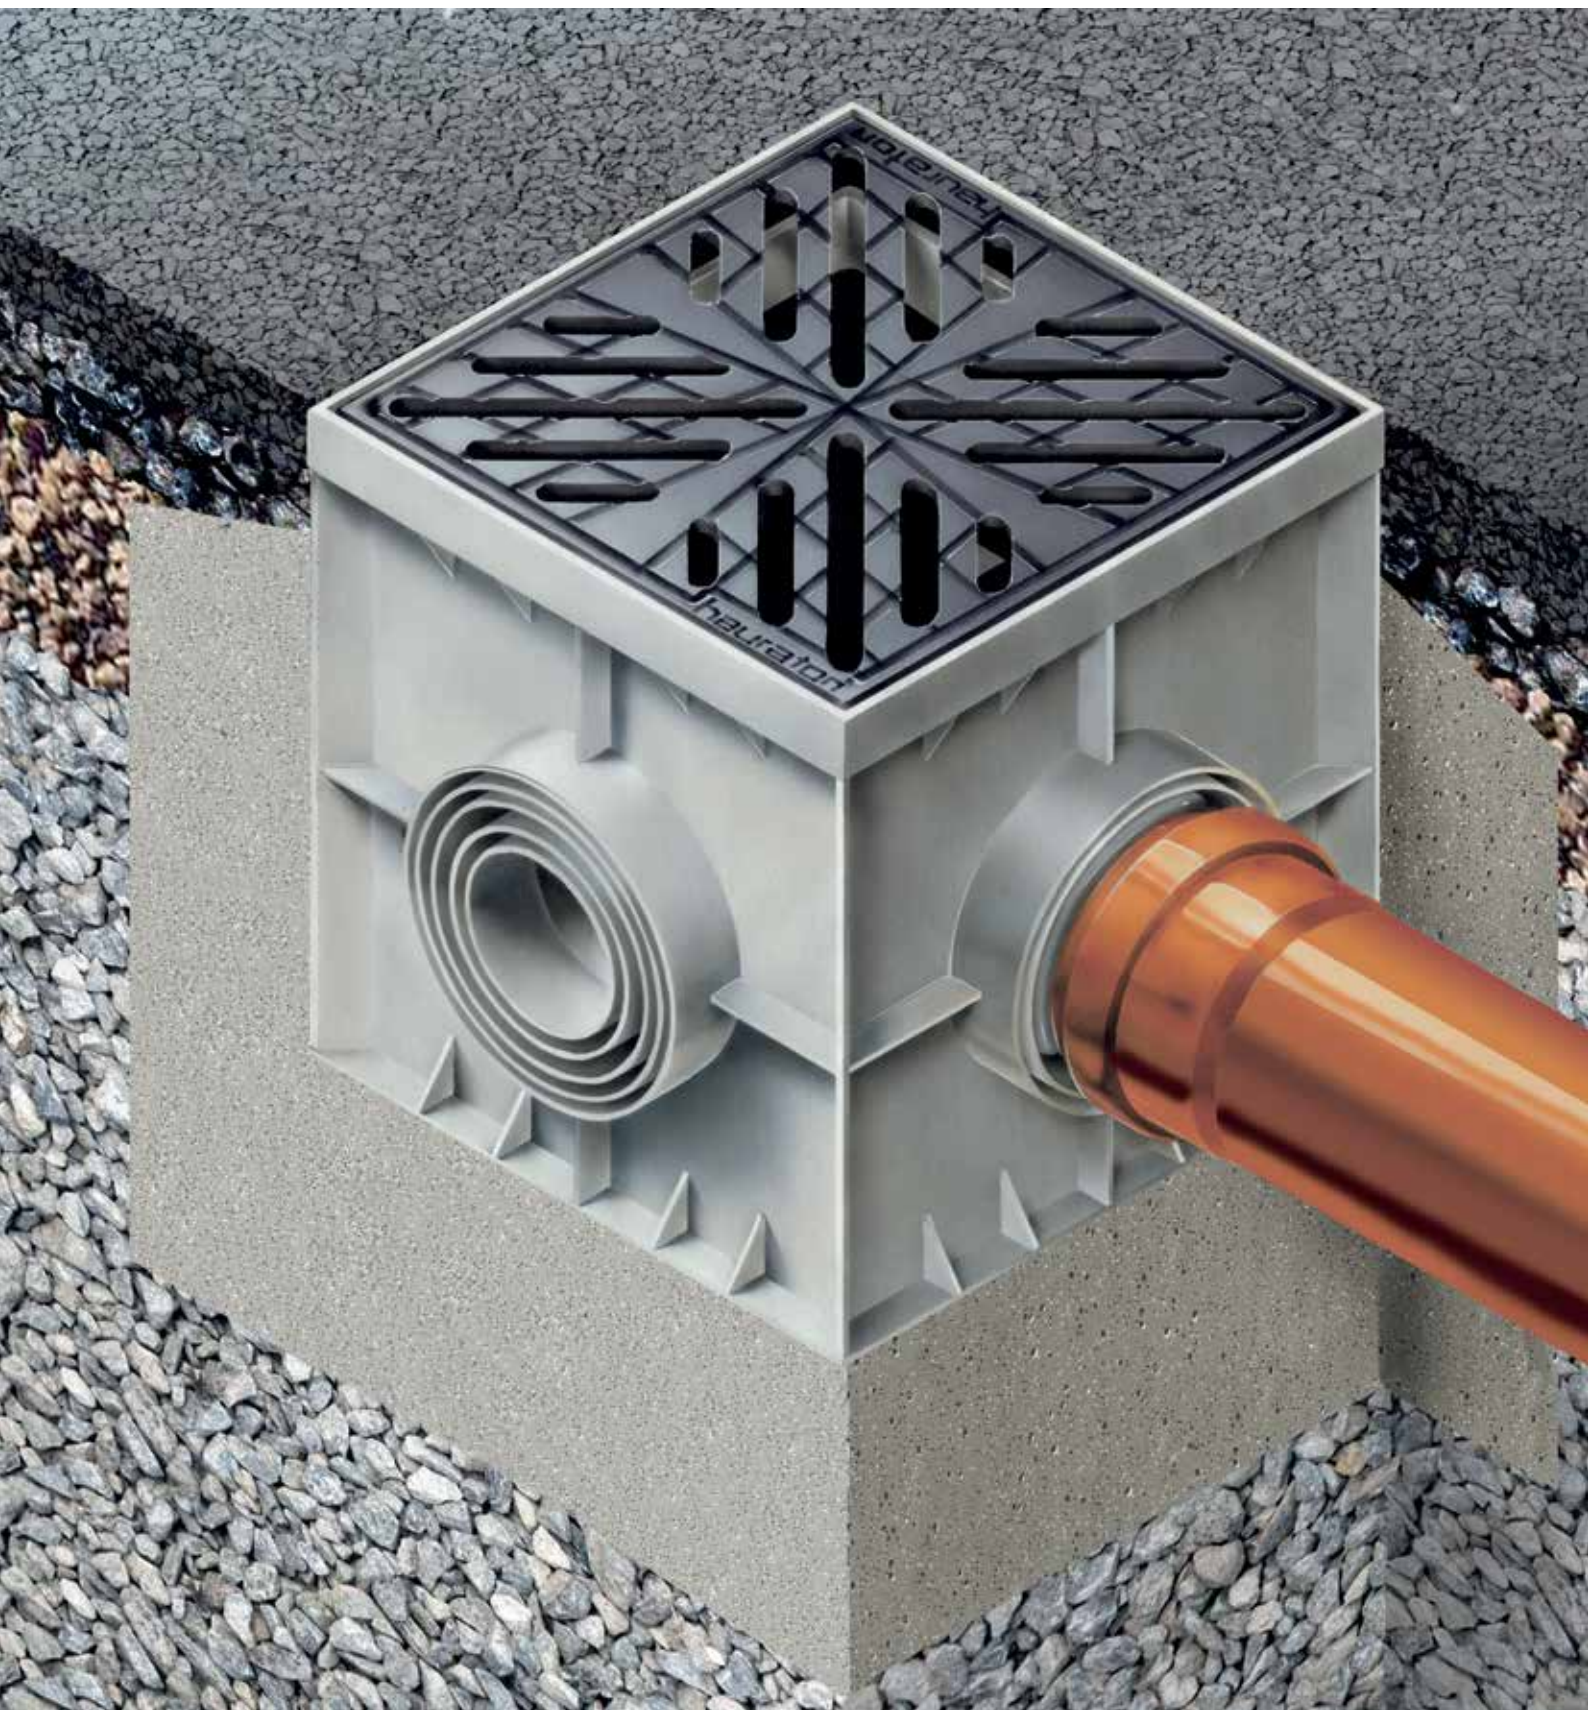

RECYFIX® POINT FASERFIX® POINT STANDARD

Point drainage for yards, garages and patios.

1 Requirements

- discharge of heavy rain or or large melting water quantities at one point.
- the system has to permanently withstand all expected traffic loads.
- the point drainage gullies can be integrated harmoniously in the surface.

2 Application areas

- courts
- garage forecourts
- places and parking areas
- ways

3 Solutions

- high stability due to materials used: polypropylene or fibre-reinforced concrete
- low weight (RECYFIX POINT) for easy transport and installation
- connection possibilities to every kind of sewage pipe
- high quality ductile iron gratings in star design and galvanised mesh gratings
- mud bucket as well as baffle as foul air trap included



Anne Sophie School in Künzelsau, Germany



Private house in Wiehl, Germany



Futterstreet in Saarbrücken, Germany



University of Wuppertal in Germany



University building in Saarbrücken, Germany

RECYFIX®
PRO

RECYFIX®
PLUS

RECYFIX®
STANDARD

DACHFIX®

Slotted Channel

FASERFIX®
STANDARD

RECYFIX®-POINT
FASERFIX®-POINT

RECYFIX®
GREEN

LINEFIX®

Your way to the tender text on **hauraton.com**

1 a) Product known

- Go to the product page.



b) Product unknown

- Go to the specification tool.




- choose application
- choose field of application, loading capacity and nominal size
- select from the proposed systems / items

2 Choose required format and add it to your documents



3 Download tender text


- Go to „My documents“.

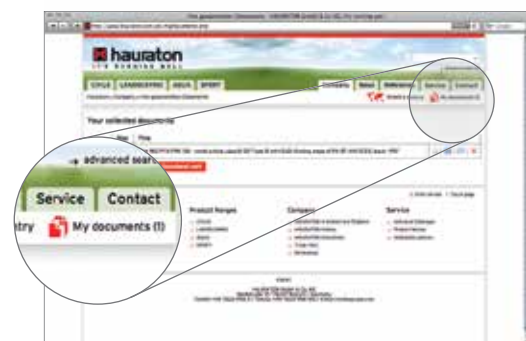

RECYFIX®POINT 30/30

RECYFIX®POINT 30/30, Point drainage, **class B 125**, with foul air trap, PE mud bucket and sleeve for KG-pipe connection DN 100

with ductile iron grating,
star design, black

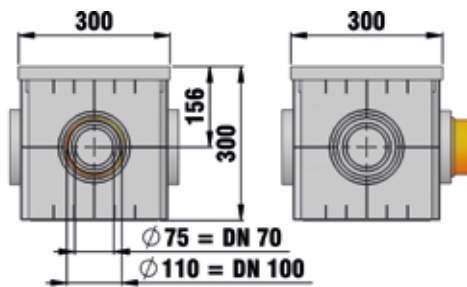

| | Length mm | Width mm | Height mm | Weight kg | Item No. |
|---|--------------|-------------|--------------|--------------|-------------|
| with ductile iron grating, star design, black | 300 | 300 | 300 | 7,6 | 185 |
| with mesh grating, MW 30/15, galvanised | 300 | 300 | 300 | 4,2 | 183 |
| Upper part made of Polypropylene, heigth 120 mm | 300 | 300 | 120 | 0,7 | 178 |


Point drainage tested in accordance with EN 124.

For FASERFIX POINT the same installation advices as for RECYFIX Channels are analogously valid.

FASERFIX®POINT STANDARD 30/30

FASERFIX®POINT STANDARD 30/30, Point drainage, **trafficable**, with foul air trap and PE mud bucket

with mesh grating MW 30/15, galvanised

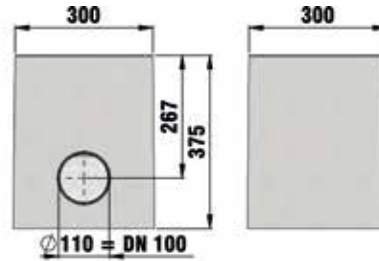

| | Length mm | Width mm | Height mm | Weight kg | Item No. |
|--|--------------|-------------|--------------|--------------|-------------|
| with mesh grating MW 30/15, galvanised | 300 | 300 | 375 | 46,6 | 4430 |

RECYFIX®
PRO

RECYFIX®
PLUS

RECYFIX®
STANDARD

DACHFIX®

Slotted Channel

FASERFIX®
STANDARD

RECYFIX®-POINT
FASERFIX®-POINT

RECYFIX®
GREEN

LINEFIX®


FASERFIX® POINT STANDARD 40/40

FASERFIX® POINT STANDARD 40/40, Point drainage, class A 15,
with foul air trap and PE mud bucket

Size 1, 2 parts, with mesh grating
MW 30/30, galvanised




Size 1, 2 parts, with mesh grating
MW 30/30, galvanised

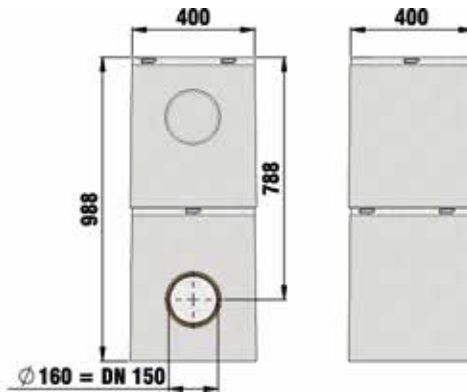

Size 2, 1 part, with mesh grating
MW 30/30, galvanised



Size 2, 1 part, with mesh grating
MW 30/30, galvanised

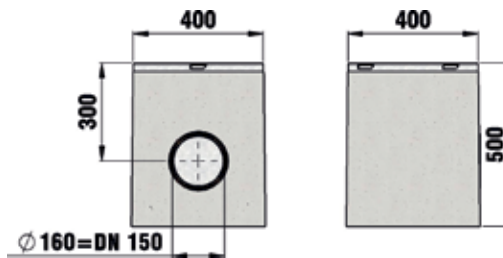

| | Length mm | Width mm | Height mm | Weight kg | Item No. |
|---|--------------|-------------|--------------|--------------|-------------|
| Size 1, 2 parts, with mesh grating MW 30/30, galvanised | 400 | 400 | 988 | 141,0 | 4860 |
| Size 2, 1 part, with mesh grating MW 30/30, galvanised | 400 | 400 | 500 | 82,4 | 4760 |
| Extension part | 400 | 400 | 488 | 63,5 | 4825 |